


## COMPACT 2.0 mm Lumaflex

Compact 2.0 mm with Lumaflex is a combination system incorporating the Compact surface, a tongue-and-groove layer of 18 mm birch plywood, and shock-absorbing foam.

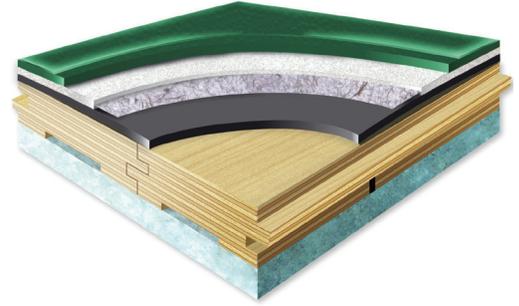

### Warranty Protection

- 10 year product coverage and 15 year wear layer coverage. Refer to sample warranty document for complete coverage details.

### Environmental Facts and LEED

- For environmental facts and LEED credits, visit: [tarkettsportsindoor.com/en/specs-and-data/environmental-fact-sheets](http://tarkettsportsindoor.com/en/specs-and-data/environmental-fact-sheets) and [tarkettsportsindoor.com/en/specs-and-data/leed-information](http://tarkettsportsindoor.com/en/specs-and-data/leed-information).

### Maintenance Instructions

- For maintenance instructions, please refer to the Omnisports maintenance guide at the following link: [tarkettsportsindoor.com/en/specs-and-data/care-and-maintenance](http://tarkettsportsindoor.com/en/specs-and-data/care-and-maintenance).

### Foam Underlayment Options

- Lumaflex shock-absorbing foam underlayment has a height of 1/2". Layers of foam cushion can be stacked to meet almost any profile requirement.

### Sports Characteristics

| Property              | Standard      | Value   |
|-----------------------|---------------|---------|
| Surface Finish Effect | ASTM F2772-11 | Passed  |
| Force Reduction       | ASTM F2772-11 | Class 4 |
| Vertical Deformation  | ASTM F2772-11 | Passed  |
| Ball Rebound          | ASTM F2772-11 | Passed  |

### Surface Layer Technical Characteristics

| Property              | Standard             | Value                                     |
|-----------------------|----------------------|---|
| Reaction to Fire      | ASTM E648            | Class 1 (Radiant Panel)                   |
| Static Load Tolerance | ASTM F970 (modified) | 200 psi                                   |
| Wear Layer            | EN 429               | 0.80 mm                                   |
| Taber Abrasion        | ASTM D3389           | 0.02 g (1,000 Cycles)                     |
| Stain Resistance      | ASTM F925            | Excellent                                 |
| Roll Width            | EN 426/EN 427        | 2 m (6.5')                                |
| Roll Length           | EN 426/EN 427        | 26 m (85.3')                              |
| Thickness             | EN 428/EN 429        | 2.0 mm (0.079")                           |
| Weight                | EN 430               | 3.1 kg/m <sup>2</sup> (0.64 lbs./sq. ft.) |

Compatible substrates include: properly constructed and prepared concrete, wood, asphalt, and cementitious underlayments. Refer to current installation guidelines, ASTM F710, ACI 302.2R, and other industry standard recommendations for more information. Tarkett Sports reserves the right to modify these specifications without affecting their compliance with standards. Some results may vary in relation to certain flexibilities found within specified testing procedures and manufacturing tolerances.



## Available Colors for Compact 2.0 mm with Lumaflex



Beech<sup>◇</sup>




Golden Maple




Classic Oak<sup>◇</sup>



Gunstock Oak<sup>◇</sup>




Grey




Black



Yellow



Orange



Red




Royal Blue



Sky Blue




Teal



Forest Green



Field Green



Grey Maple



Green Maple



Blue Maple



Red Maple

The colors presented here are representations only. An actual sample is recommended for exact color evaluation and matching.  
<sup>◇</sup>This pattern has a 3" wide plank. Other wood patterns have a width of 2 1/4".