


OMNISPORTS

3.5 mm Lumaflex

Omnisports 3.5 mm with Lumaflex is a combination system incorporating the Omnisports surface, a tongue-and-groove layer of 18 mm birch plywood, and Healthier Choice® foam.

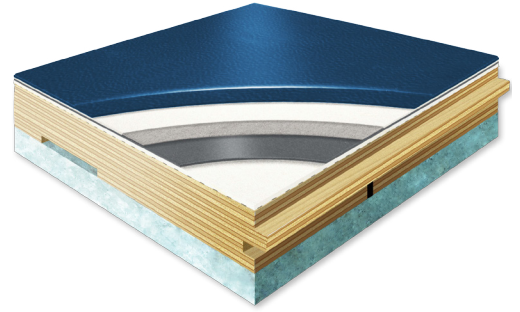

Warranty Protection

- 10 year product coverage and 15 year wear layer coverage. Refer to sample warranty document for complete coverage details.

Environmental Facts and LEED

- For environmental facts and LEED credits, visit: tarkettsportsindoor.com/en/specs-and-data/environmental-fact-sheets and tarkettsportsindoor.com/en/specs-and-data/leed-information.

Maintenance Instructions

- For maintenance instructions, please refer to the Omnisports maintenance guide at the following link: tarkettsportsindoor.com/en/specs-and-data/care-and-maintenance.

Foam Underlayment Options

- Omnisports 3.5 mm Lumaflex is available with two Healthier Choice® foam underlayments, both of which are GREENGUARD Gold certified. These options allow the profile of Omnisports 3.5 mm Lumaflex to be adapted to fit the requirements of the project.
- Healthier Choice® 0.5" Foam yields a complete system profile of approximately 1.34".
- Healthier Choice® 1.5" Foam yields a complete system profile of approximately 2.34".

Sports Characteristics

Property	Standard	Value
Surface Finish Effect	ASTM F2772-11	Passed
Force Reduction	ASTM F2772-11	Class 4
Vertical Deformation	ASTM F2772-11	Passed
Ball Rebound	ASTM F2772-11	Passed

Surface Layer Technical Characteristics

Property	Standard	Value
Reaction to Fire	ASTM E648	Class 1 (Radiant Panel)
Static Load Tolerance	ASTM F970 (modified)	200 psi
Indentation Resistance	EN 1516	0.16 mm
Rolling Load	EN 1569	≤ 0.5 mm (No Degradation)
Resistance to Impact	EN 1517	No Degradation
Taber Abrasion	ASTM D3389	0.02 g (1,000 Cycles)
Stain Resistance	ASTM F925	Excellent
Roll Width	EN 426/EN 427	2 m (6.5')
Roll Length	EN 426/EN 427	26 m (85.3')
Thickness	EN 428/EN 429	3.5 mm (0.138")
Weight	EN 430	4.25 kg/m ² (0.87 lbs./sq. ft.)

Compatible substrates include: properly constructed and prepared concrete, wood, asphalt, and cementitious underlayments. Refer to current installation guidelines, ASTM F710, ACI 302.2R, and other industry standard recommendations for more information. Tarkett Sports reserves the right to modify these specifications without affecting their compliance with standards. Some results may vary in relation to certain flexibilities found within specified testing procedures and manufacturing tolerances.



Available Colors for Omnisports 3.5 mm with Lumaflex



Beech



Golden Maple[◇]



Classic Oak



Gunstock Oak



Grey



Black



Yellow



Orange



Dark Orange



Red



Royal Blue



Sky Blue



Forest Green



Field Green



Teal

The colors presented here are representations only. An actual sample is recommended for exact color evaluation and matching.
◇This pattern has a 2 ¹/₄" wide plank. Other wood patterns have a width of 3".