

ClutchCourt Performance is a field-constructed hardwood sports floor with a two-layer plywood substructure, 3/4" shock pads, and a MFMA maple surface.





Warranty Protection

 10-year comprehensive coverage. Refer to sample warranty document for complete coverage details.

Environmental Facts

For environmental facts, visit: tarkettsportsindoor.com/en/specs-and-data/environmental-fact-sheets.

Maintenance Instructions

For a complete maintenance guide, visit: tarkettsportsindoor.com/en/specs-and-data/ care-and-maintenance.

Finishes

Use only MFMA certified finishes. Water-based or oil-modifed products are recommended.

Sports Characteristics

Property	Standard	Value
Force Reduction	ASTM F2772	Class 5
Ball Rebound	ASTM F2772	Passed

Technical Characteristics


Property	Value	
Maple Plank Length	Random	
Maple Plank Width Options	2 ^{1/4"} (Standard), 1 ^{1/2"}	
Maple Plank Thickness Options	25/32" (Standard), 33/32"	
Maple Plank Grade Options	First Grade, Second and Better Grade, Third Grade	
Shock Pad Durometer Options	70, 55, 45	
FSC Chain-of-Custody Certified	Yes (Available Upon Request)	
Shock Pad Profile	3/4"	
Shock Pad Placement	12"	
Plywood	15/32" Double Layer 3-Ply CDX Grade APA	
Total System Profile	2 ^{1/2"} (Modifiable)	

Compatible substrates include: properly constructed and prepared concrete, wood, asphalt, and cementitious underlayments. Refer to current installation guidelines, ASTM F710, ACI 302.2R, and other industry standard recommendations for more information. Tarkett Sports reserves the right to modify these specifications without affecting their compliance with standards. Some results may vary in relation to certain flexibilities found within specified testing procedures and manufacturing tolerances.


888.364.6541 tarkettsportsindoor.com




Technical Details for ClutchCourt Performance

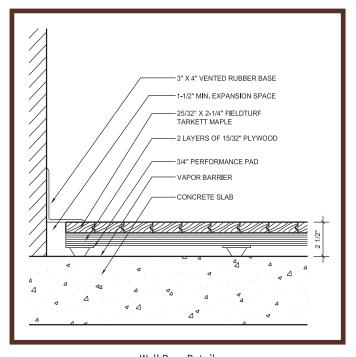




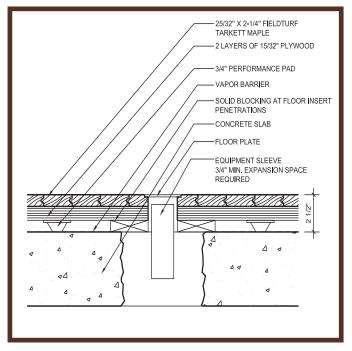

Insert Detail

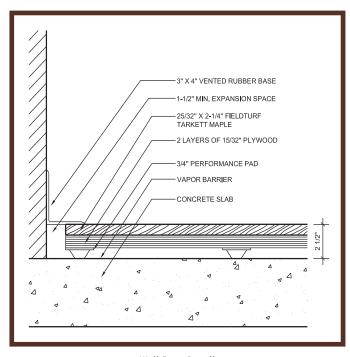

Wall Base Detail

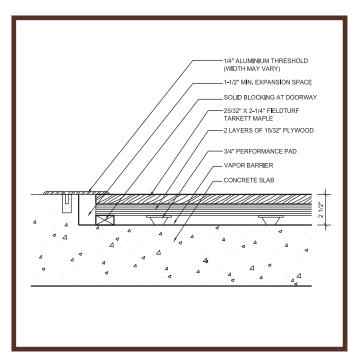

Threshold Detail

