


# DROPZONE

Comfort 10.5 mm

Dropzone Comfort 10.5 mm is a rubber surface with EPDM color chips that is intended for walking/jogging tracks and other fitness applications. It is designed for durability and comfort.

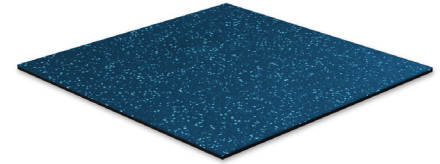

## Warranty Protection

- 3-year comprehensive product coverage. Refer to sample warranty document for complete coverage details.

## Environmental Facts

- For environmental facts, visit: [tarkettportsindoor.com/en/specs-and-data/environmental-fact-sheets](https://tarkettportsindoor.com/en/specs-and-data/environmental-fact-sheets).

## Maintenance Instructions

- For a complete maintenance guide, visit: [tarkettportsindoor.com/en/specs-and-data/care-and-maintenance](https://tarkettportsindoor.com/en/specs-and-data/care-and-maintenance).

## Installation Methods

- Full Adhesive: full glue installation using Tarkett's solvent-free Multi-Poxy adhesive over the entire surface area (moisture tolerance: 98% RH per ASTM F2170)
- Dropzone Comfort can be installed using Tarkett Sports' Beybond 50 adhesive. With Dropzone Comfort, Beybond 50 can tolerate up to 92% RH per ASTM F2170.
- If conditions require a moisture barrier, Dropzone Comfort can be installed with Tarkett Sports' Tarkolay. This system requires no moisture testing.


## Technical Characteristics

Property	Standard	Value
Slip Resistance	ASTM D2047	> 0.9
Tensile Strength	ASTM D412	200 psi
Impact Insulation	ASTM E492-04	54
Sound Transmission	ASTM E413-04	54
Noise Reduction	ASTM C423-08a	0.1
Static Load Tolerance	ASTM F970 (modified)	0.009" (Typical)
Thermal Conductivity	ASTM C518	> 0.4
Color Stability	ASTM F1515	Good
CA Section 01350 Compliance	ASTM D5116	Passed
Chemical Resistance	ASTM F925	Good
Surface Texture	—	Slight
Total Thickness	—	10.5 mm (0.571")
Surface Thickness	—	2.5 mm (0.098")
Cushion Thickness	—	8 mm (0.314")
Roll Length	—	25' to 50'
Roll Width	—	4' (± 0.75")
Weight	—	11.4 kg/m <sup>2</sup> (2.34 lbs./sq.ft.)

Compatible substrates include: properly constructed and prepared concrete, wood, asphalt, and cementitious underlayments. Refer to current installation guidelines, ASTM F710, ACI 302.2R, and other industry standard recommendations for more information. Tarkett Sports reserves the right to modify these specifications without affecting their compliance with standards. Some results may vary in relation to certain flexibilities found within specified testing procedures and manufacturing tolerances.




## Available Colors for Dropzone Comfort 10.5 mm




Black DZ00


### Group 2 - 20% Color




Fire Fly DZ47A



Smoke DZ46




Deep Ocean DZ45




Whey Protein DZ97A


### Group 3 - 30% Color



Sky Blue DZ103




Red DZ104




Raiders DZ503


### Group 4 - 95% Color




Steel DZ15A




Warm Grey DZ507



Cobalt Blue DZ500




Desert DZ43A




Medium Grey DZ504




Charcoal DZ505




Maroon DZ510




Dark Taupe DZ506



Green DZ509



Navy DZ508



Red Appeal DZ511



Dark Gray DZ502

The colors presented here are representations only. An actual sample is recommended for exact color evaluation and matching.