


PolyTurf Plus Pad and Pour 7+2 is a seamless polyurethane sports surface that is designed for durability. This field-constructed system includes a 7 mm recycled rubber base mat for comfort and shock absoprtion.



## **Warranty Protection**

 30-year comprehensive product coverage plus 10year moisture tolerance coverage. Refer to sample warranty document for complete coverage details

#### **Environmental Facts and LEED**

■ For environmental facts and LEED credits, visit: tarkettsportsindoor.com/en/specs-and-data/environmental-fact-sheets and tarkettsportsindoor. com/en/specs-and-data/leed-information.

#### **Maintenance Instructions**

For maintenance instructions, please refer to the PolyTurf Plus Pad and Pour maintenance guide at the following link: tarkettsportsindoor.com/en/ specs-and-data/care-and-maintenance.

#### **Installation Methods**

- Multi-Poxy Adhesive: installation using Tarkett's solvent-free Multi-Poxy adhesive, which allows moisture tolerance of up to 98% relative humidity per ASTM F2170.
- Beybond 50 Adhesive: installation using Beybond 50 two-part polyurethane adhesive, which allows moisture tolerance of up to 92% relative humidity per ASTM F2170.
- Tarkolay with Multi-Poxy: installation over Tarkolay moisture barrier using Tarkett's solvent-free Multi-Poxy adhesive, which allows moisture tolerance of up to 100% relative humidity per ASTM F2170.

## **Sports Characteristics**

Property	Standard	Value
Surface Finish Effect	ASTM F2772-11	Passed
Force Reduction	ASTM F2772-11	Class 2
Vertical Deformation	ASTM F2772-11	Passed
Ball Rebound	ASTM F2772-11	Passed

### **Technical Characteristics**

Property	Standard	Value
Reaction to Fire	ASTM E648	Class 1 (Radiant Panel)
Shore Hardness	_	80 (Shore A)
Rolling Load	EN 1569	≤ 0.5 mm (No Degradation)
Tensile Strength	ASTM D412	3200 psi
Elongation	ASTM D412	340%
Tear Strength	ASTM D624	360 PLI
Thickness	_	9.0 mm (0.354")
Roll Width (Base Mat)	_	1.5 m (59")
Roll Length (Base Mat)	_	25 m (82')
Weight (Base Mat)	_	4.5 kg/m² (0.93 lbs./sq. ft.)
Density (Base Mat)	ASTM D297	0.67 min g/cm³
Tensile Strength (Base Mat)	ASTM D412	88 psi (die cast C)
Elongation (Base Mat)	ASTM D412	48.5% (die cast C)
Compression (Base Mat)	ASTM F36	87% (50 psi), 91% (100 psi), 91% (200 psi)
Flexibility (Base Mat)	ASTM F147	0-1
Compression Set B (Base Mat)	ASTM D395	37% (25% deflection, 158° F/22 hrs.)
Compression Set B (Base Mat)	ASTM D395	26% (50% deflection 158°F/22hrs)

Compatible substrates include: properly constructed and prepared concrete, wood, asphalt, and cementitious underlayments. Refer to current installation guidelines, ASTM F710, ACI 302.2R, and other industry standard recommendations for more information. Tarkett Sports reserves the right to modify these specifications without affecting their compliance with standards. Some results may vary in relation to certain flexibilities found within specified testing procedures and manufacturing tolerances.

888.364.6541 tarkettsportsindoor.com



# Available Colors for PolyTurf Plus Pad and Pour 7+2



The colors presented here are representations only.

For information on obtaining individual color swatches, contact a local Tarkett Sports representative or call 888-364-6541.






The colors presented here are representations only.

For information on obtaining individual color swatches, contact a local Tarkett Sports representative or call 888-364-6541.



# **Game Line Colors**

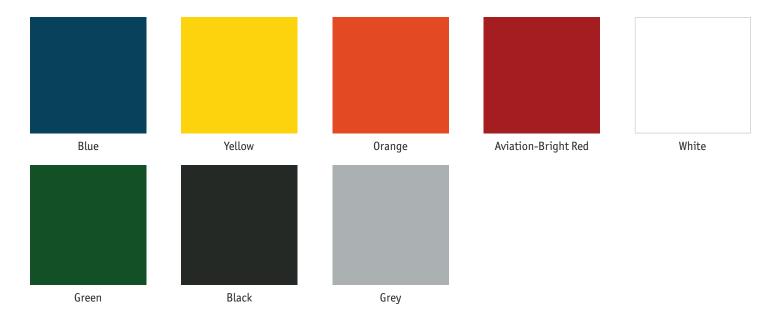

The colors presented here are representations only.

For information on obtaining individual color swatches, contact a local Tarkett Sports representative or call 888-364-6541.

