


**Description**

Omnisports Extreme is a vinyl sports floor containing a non-woven fiberglass layer and PVC foam backing. Its slightly textured surface is protected with Top Clean xp®, allowing easy maintenance.

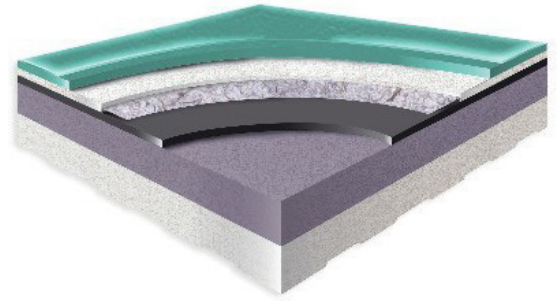

PROPERTY	STANDARD	VALUE
----------	----------	-------

SPORTS CHARACTERISTICS		
Ball Rebound	ASTM F2772-11	Passed
Force Reduction	ASTM F2772-11	Class 4
Surface Finish Effect	ASTM F2772-11	Passed
Vertical Deformation	ASTM F2772-11	Passed

TECHNICAL CHARACTERISTICS		
Roll Length	EN 426/EN 427	15 m (49.2')
Roll Width	EN 426/EN 427	2 m (6.5')
Resistance to Wear	EN ISO 5470-1	≤ 1.0 g
Resistance to Indentation	EN 1516	≤ 0.5 mm
Resistance to Impact	EN 1517	No Degradation
Rolling Load	EN 1569	≤ 0.5 mm (No Degradation)
Reaction to Fire	ASTM E648	Class 1 (Radiant Panel)
Stain Resistance	ASTM F925	Excellent
Light Stability of Resilient Flooring by Color Change	ASTM F1515	Excellent
Thickness	EN 428/EN 429	12 mm (0.47')
Wear Layer Performance Grade	ASTM F1303	Type 1, Grade 1, Commercial
Wear Layer Structure	-	2.0 mm
Wear Layer Thickness	ASTM F410/F1303	0.76 mm
Weight	EN 430	7.1 kg/m2 (1.45 lbs./sq. ft.)

Compatible substrates include: properly constructed and prepared concrete, wood, asphalt, and cementitious underlayment. Refer to current installation guidelines, ASTM F710, ACI 302.2R, and other industry standard recommendations for more information. Tarkett Sports reserves the right to modify these specifications without affecting their compliance with standards. Some results may vary in relation to certain flexibilities found within specified testing procedures and manufacturing tolerances.

**Warranty Protection**

25-year wear layer and product defect coverage plus 25-year moisture tolerance coverage. Refer to sample warranty document for complete coverage.

**Installation Methods**

- Full Adhesive: installation using Tarkett’s Multi-Poxy adhesive, HS Sports Spray, or Multi-Set acrylic adhesive over the entire area (moisture tolerance: 98% RH using Multi-Poxy, 90% RH using HS Sports Spray, 83% using Multi-Set per ASTM F2170)

**Environmental Facts and LEED**

For environmental facts and LEED credits, visit: <https://www.tarkettsportsindoor.com/wp-content/uploads/2020/02/Omnisports-7-1-Environmental-Fact-Sheet.pdf> and <https://www.tarkettsportsindoor.com/wp-content/uploads/2020/02/Booklets-OMNISPORTS-LEED-TS-Indoor-FEB2020.pdf>

**Maintenance Instructions**

For a complete maintenance guide, visit: <https://www.tarkettsportsindoor.com/en/specs-and-data/care-and-maintenance>


Available Color



Golden Maple



Classic Oak\*



Orange



Teal



Royal Blue



Red



Grey



Forest Green

\*This pattern has a 3" wide plank. Maple patterns have a width of 2 1/4".

The colors presented here are representations only. An actual sample is recommended for exact color evaluation and matching. Other Custom Colors available. Contact your Regional Sales Manager.

888.364.6541  
tarkettsportsindoor.com